


ABS5000 CONCRETE Lifting Instructions (Tank 1 & 2)

Total Mass = 8.00 Tonne


Total Height = 2700mm

Total Width = 2425mm

USE ONLY CERTIFIED LIFTING BARS

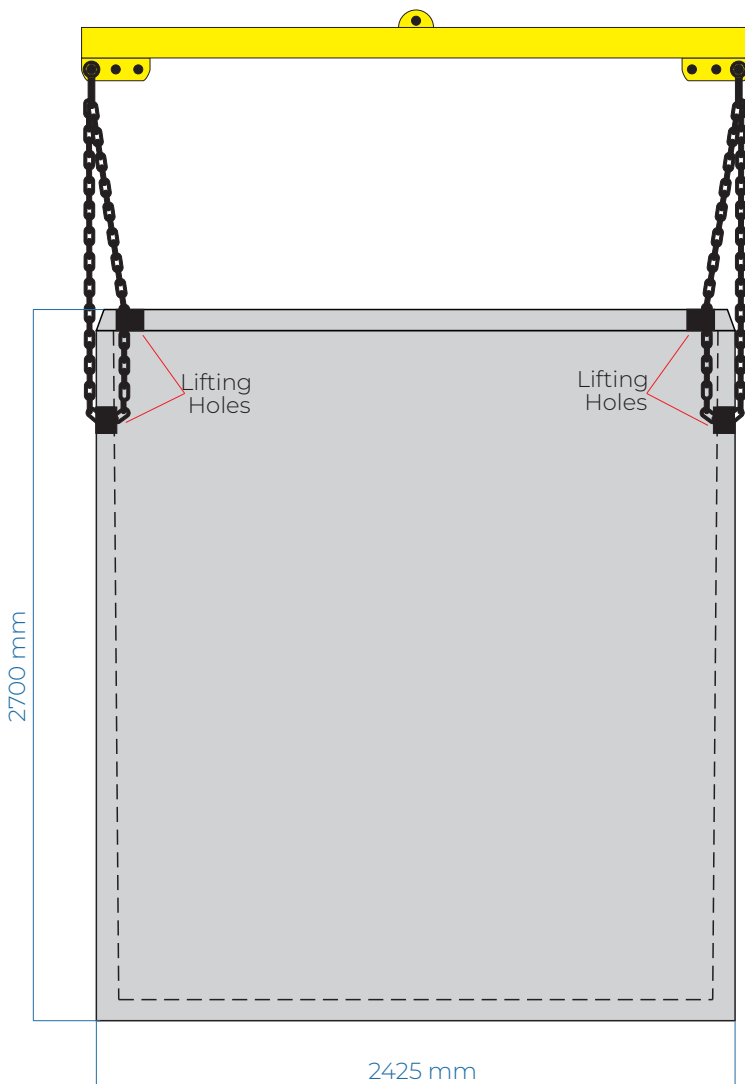

1. Always use a Spreader Bar and ensure it is certified
2. Lower chains through TOP lifting holes provided in the lid of the ABS5000
3. Loop chains through the lifting holes directly below on the inside wall of the ABS5000
4. Steel reinforcing bars have been installed inside the concrete for lifting purposes. Only lift this tank from these holes
5. If you don't use a Spreader Bar, you risk damaging the ABS5000
6. Ensure the tank is empty before lifting

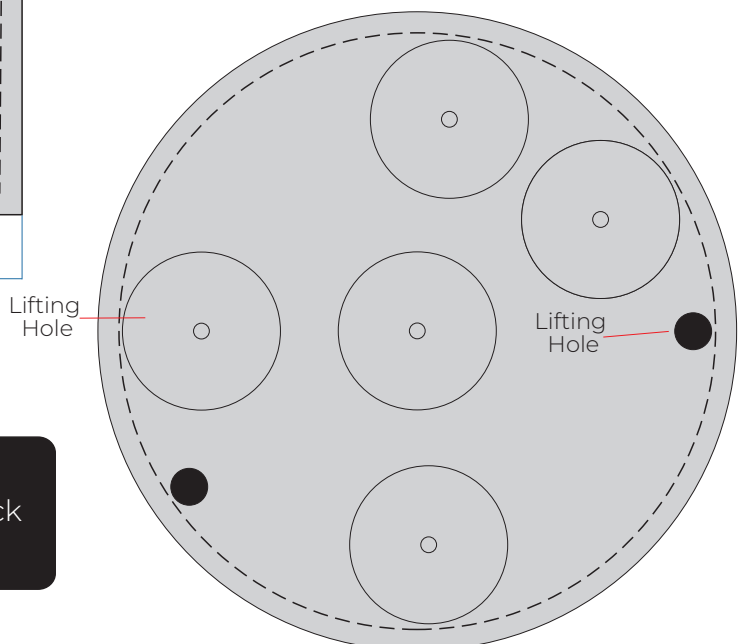

REACH OF CRANE/ CRANE TRUCK
To be determined by your crane/ crane truck operator.